



GE-NR1730/IBP16

4HDD, 40CH, PSE

LK series



KEY FEATURES

- Up to 40-ch IP camera accesses
- Incoming/Outgoing bandwidth: 400Mbps/400Mbps
- S+265, H.265, S+264, H.264 video formats
- Max. decoding capability: 16MP(30fps)×2 or 1080P(30fps)×16
- 16-ch synchronous playback
- Up to 10 TB capacity for each HDD
- HDMI output at up to 4K resolution
- Simultaneous HDMI and VGA outputs
- 1×RJ-45, 10/100/1000 Mbps self-adaptive Ethernet port
- Support cloud upgrade
- S+ 265 compression effectively reduces the storage space by up to 75%
- PoE interface, 16×RJ45, 10/100 Mbps self-adaptive Ethernet port



SPECIFICATIONS

Intelligent Analytics	
AI by Camera	Tripwire; Double Tripwire; Perimeter; Object Abandon; Object Missing; Loiter; Running; Parking; Heatmap; Video Abnormal; Audio Abnormal; License Plate Recognition; On Duty Detection; Crowd Detection; Parking Guard; Safety Helmet Detection; Electric Bicycle Detection; People Counting; Link to Tracking; Smoke and Fire Detection; Environmental Temperature Measurement; Face Detection; Human Body Temperature Measurement; Smart Motion; Face Recognition; Human/Vehicle Classification
VCA Search	Heatmap; Early-warning Search; Behavior Search; License Plate Search; Safety Helmet Search; Thermographic Retrieval; Duty Search; Electric Bicycle Retrieval; Face Search
Storage	
HDD Capacity	Up to 10 TB capacity for each HDD
Disk Group	4 Disk Group
RAID	JBOD, RAID0, RAID1, RAID5, RAID6, RAID10
Record Playback	
Multi-channel Playback	16
Record Mode	Manual Recording; Alarm Recording; Schedule Recording
Storage Method	Local HDD
Backup	USB storage device, Network
Playback Function	Play/Pause/Stop/Slow/Speed/Backwards 30s/Forwards 30s/Full Screen/Backup (Video Editing)/Step/ Digital Zoom
Dual Stream Record	Yes
Video and Audio	
Access Channel	40
Incoming Bandwidth	400Mbps
Outgoing Bandwidth	400Mbps
Resolution	16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Preview Decoding Capability	16MP(30fps)×2, 12MP(30fps)×3, 8MP(30fps)×4, 6MP(30fps)×4, 5MP(30fps)×6, 4MP(30fps)×8, 3MP(30fps)×9, 1080P(30fps)×16, 720P(30fps)×32, 4CIF(30fps)×40
Playback Decoding Capability	16MP(30fps)×2, 12MP(30fps)×3, 8MP(30fps)×4, 6MP(30fps)×4, 5MP(30fps)×6, 4MP(30fps)×8, 3MP(30fps)×9, 1080P(30fps)×16, 720P(30fps)×16
Third-party Camera Access	ONVIF; RTSP
HDMI Output	HDMI: 800×600(60Hz), 1024×768(60Hz), 1280×720(50Hz/60Hz), 1280×800(60Hz), 1366×768(60Hz), 1440×900(60Hz), 1920×1080(50Hz/60Hz), 2560×1440(30Hz/60Hz), 2560×1600(60Hz), (4K)3840×2160(30Hz/60Hz)
VGA Output	VGA: 800×600(60Hz), 1024×768(60Hz), 1280×720(50Hz/60Hz), 1280×800(60Hz), 1366×768(60Hz), 1440×900(60Hz), 1920×1080(50Hz/60Hz)
Multi-screen Display	Independent Output: HDMI: 1/2/3/4/5/6/7/8/9/10/12/13/16/20A/20B/25/32/36/40 VGA: 1/2/3/4/5/6/7/8/9/10/12/13/16/20A/20B/25/32/36/40
Audio Input	1-ch, 3.5mm
Audio Output	1-ch, RCA (Linear, 1 KΩ)
Two-Way Audio	1-ch, 3.5mm, using the audio input



External Port

USB	2×USB2.0; 1×USB3.0
HDMI	1×HDMI (supports up to 4K resolution output)
VGA	1×VGA
Network Interface	1×RJ-45, 10/100/1000 Mbps self-adaptive Ethernet port
SATA	4×SATA interface
RS485	1×RS485
Alarm I/O	16-ch, TTL inputs, 3mA, 3.3VDC; 4-ch, relay outputs, 1A, 24VDC

Network

Protocols	ARP; DDNS; DHCP; DNS; Easy DDNS; FTP; HTTP; HTTPS; ICMP; IGMP; IPv4; IPv6; Multicast; NFS; NTP; PPPoE; RTCP; RTP; RTSP; SMB/CIFS; SMTP; SNMP v1; SRTP; SSH; SSL; TLSv1.2, TLSv1.3; TCP/IP; UDP; Unicast; UPnP
System Compatibility	ONVIF(Profile S/T/G); RTSP; CGI; SDK
Client	Golden Eye VMS
Web	IE10+; Firefox52+; Edge89+; Safari11+; Chrome57+

Alarm

General Alarm	Motion Detection; Mask Alarm; Alarm Input(IPC); Alarm Input(NVR); Manual Alarm
Exceptions Alarm	Video Loss; IP Conflict; MAC Conflict; Network Disconnected; No Disk; Illegal Access; Disk group space alert; Disk Full; Disk R/W Error; Recording Abnormal; Abnormal found in smart of disk; Abnormal temperature of the disk; Array Exception; PoE Overload; Voltage Alarm(IPC); RTC Failure

General

Web Client Language	Simple Chinese; Traditional Chinese; English; Spanish; Korean; Italian; Turkish; Russian; Thai; French; Polish; Dutch; Hebrew; Arabic; Vietnamese; German; Ukrainian; Portuguese; Albanian
Operating Temperature	-10°C~+55°C (+14°F~+131°F)
Operating Humidity	10%~90%RH (non-condensing)
Storage Temperature	-20°C~+60°C (-4°F~+140°F)
Power Consumption	<10W(without HDD&without PoE)
Power Supply	100~240V AC
Boundary Dimensions	440(L)347(W)75(H)mm
Package Dimensions	540(L)175(W)455(H)mm
Package Kit	Network Video Recorder; Screw Pack; Mouse; European Standard Power Cord; 2×Ear Plate; 4×SATA Hard Disk Data Cable; 2×SATA Power Cord
Net Weight	4.2 kg
Gross Weight	5.8 kg




Compression	
Video Compression	S+265; H.265; S+264; H.264
Audio Compression	G711A; G711U; AAC; ADPCM_DIV4
Stream Type	Video; Video & Audio
Face Detection	
Face Attributes	Gender; Age; Glasses; Face Mask; Body Temp
Face Recognition	
Face Picture Library	Up to 300 face libraries Up to 100000 base images
Face Picture Comparison	Face Picture Comparison (Cooperate with facial recognition IPC)
POE	
PoE Interface	16×RJ45, 10/100 Mbps self-adaptive Ethernet port
PoE Budget	200W
Power per PoE Port	30W
Standard	IEEE 802.3 af/at

Design and specifications are subject to change for product improvements without prior notice



DIMENSIONS (Unit: mm)

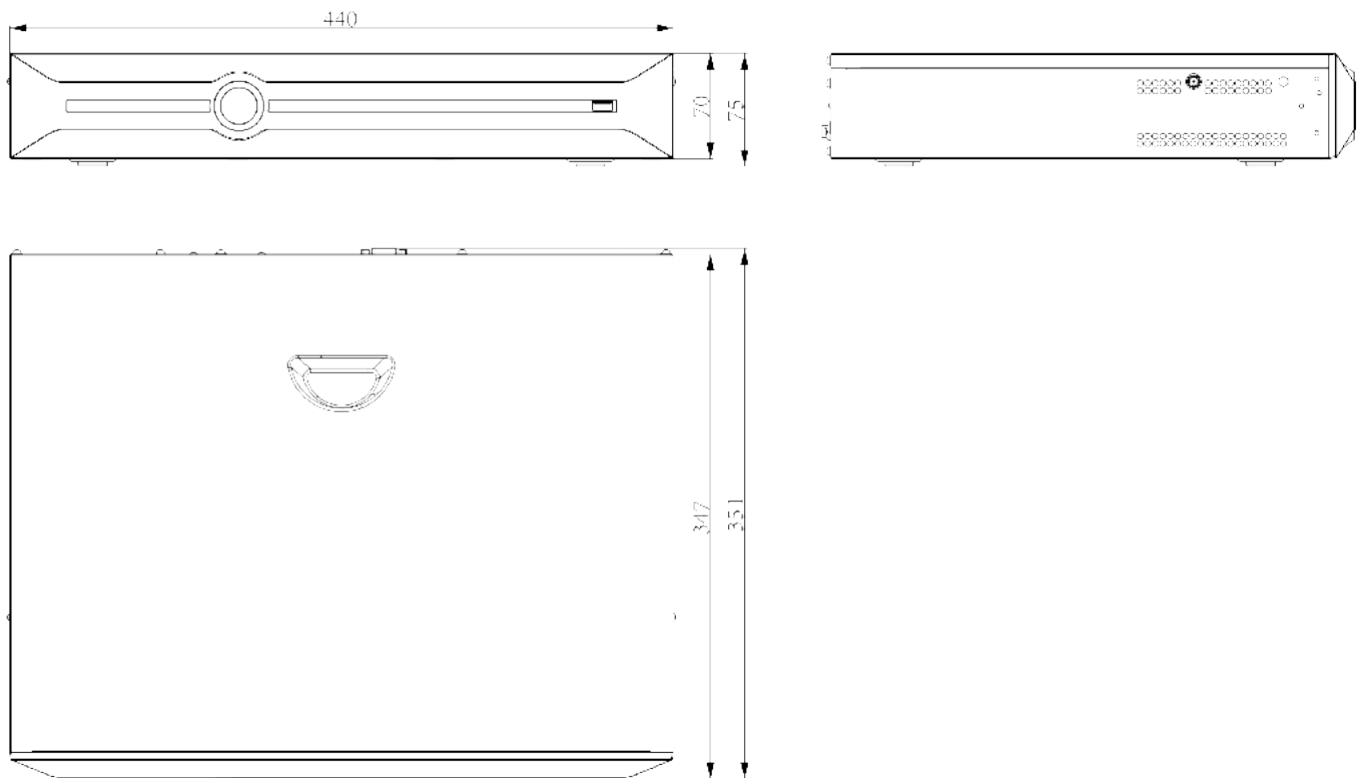

Physical Interfaces

